

# RG59 MINI COAX

## WITH 95% COPPER BRAID




DATA CABLE ONLINE

### DESCRIPTION

RG59 Mini, 24AWG Solid Bare Copper Conductor with 95% Bare Copper Braid, CL2, CM, PVC Jacket.

### FEATURES

- Mini RG59
- 24AWG Solid Conductor
- 75 Ohm Impedance
- ISO 9001:2000
- ETL, RoHS Compliant
- 1000ft Pull Box

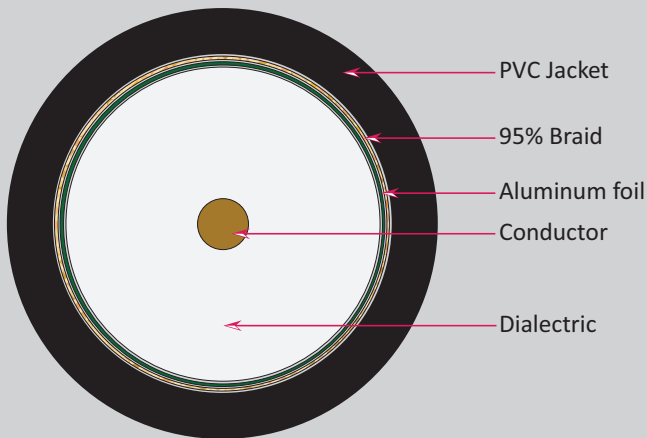

**SKU: 107-2174/MINI59**

### Construction

<b>Conductor</b>	<b>Bare Copper</b>
Diameter	0.50±0.01mm (24AWG)
<b>Dielectric</b>	<b>Foam PE</b>
Diameter	2.50±0.05mm
<b>Shield</b>	<b>Double Aluminum Foil</b>
<b>Braid</b>	<b>Bare Copper</b>
Coverage	95%×16×7×0.11±0.005mm
<b>Jacket</b>	<b>PVC</b>
Diameter	4.20±0.10mm

### Electrical Characteristics

Sparker Test	4000VAC
Impedance	75±3 Ohm
Capacitance	54±3pF/m
Velocity of Propagation	83%
Return Loss	(5~470Mz)≥20dB (470~1000Mz)≥18dB

### Mechanical Characteristics

Operating Temperature Range -20°C to 75°C

Jacket color available in  
Black



Intertek

[WWW.DATACABLESONLINE.COM](http://WWW.DATACABLESONLINE.COM)